


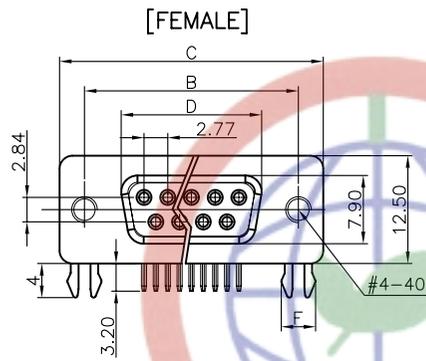




REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 06/14/07'	~	







RECOMMEND PCB LAYOUT(TOLERANCE ± 0.05)
(VIEW FROM TOP SIDE)



WITH SCREW TYPE



WITH RIVET TYPE

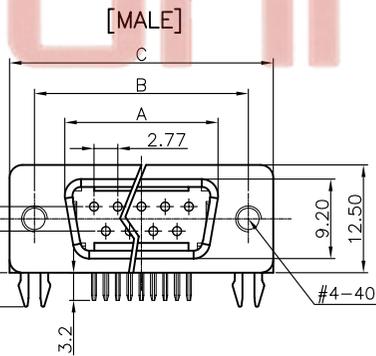

WITH SCREW AND RIVET TYPE

NOTES: 备注

1. PRODUCTS PERFORMANCE:

- 1.0 VOLTAGE RATING: 250V AC.
- 1.1 CONTACT CURRENT RATING: 1.5A MAX. PER PIN.
- 1.2 CONTACT RESISTANCE: 20m Ω MAX.
- 1.3 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
- 1.4 INSULATION RESISTANCE: 1000M Ω MIN.
- 1.5 OPERATING TEMPERATURE: -20°C~+70°C.

2. PRODUCT NUMBER CODE:

DS1037 -01- X X X X X X X X

SCREW DIM. E

- 4: 4.80mm
- 5: 5.80mm

BOARD LOCK DIM. F

- 4: 4.00mm
- 7: 3.70mm

CONTACT PLATING

- T: SELECTIVE GOLD FLASH
- Si: FULL GOLD FLASH

COLOR OF HOUSING

- K: BLACK
- B: BLUE

SCREW TYPE

- A: WITH SCREW TYPE
- B: WITH RIVET TYPE
- C: WITH SCREW AND RIVET TYPE
- D: WITH RIVET AND ATTACHED SCREW TYPE

SHELL PLATING

- N: Nickel
- T: Tin

CONNECTOR TYPE

- M: MALE
- F: FEMALE

No. OF CONTACT

- 09: 9pos.
- 15: 15pos.
- 25: 25pos.
- 37: 37pos.

Tel: 86-574-63508787

Fax: 86-574-63510817

Dimension

Position	A ± 0.2	B ± 0.2	C ± 0.2	D
9	17.90	24.99	30.80	16.33
15	26.50	33.32	39.14	24.66
25	40.00	47.04	53.04	38.38
37	56.50	63.50	69.32	54.84

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ± 0.50	X. $\pm 3^\circ$
.X ± 0.30	.X $\pm 2^\circ$
.XX ± 0.20	.XX $\pm 1^\circ$

PROJECTION	TITLE
	D-SUB RIGHT ANGLE(9.4mm) TYPE
UNITS	mm
SHEET SIZE	A4
SERIES	DS1037-01 SERIES

DRAWING TYPE	ASSEMBLY
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	C-DS1037-01-XXXXXXX

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD