



USB Connector series


KLS1-235 (Micro USB 5P PLUG)

Electrical Characteristics

Rated Current :0.5A
 Rated Voltage: 30V AC (rms)
 Dielectric withstanding voltage: 100V DC for 1 min.
 Insulation Resistance : 100 MΩ Min.
 Contact resistance: 50 mΩ max.
 Temperature rating:-30 C ~ +80 C


Materials

Housing: LCP UL 94V-0, black color
 Contacts: Copper alloy
 Pin Plated: Gold plated or matte tin plated

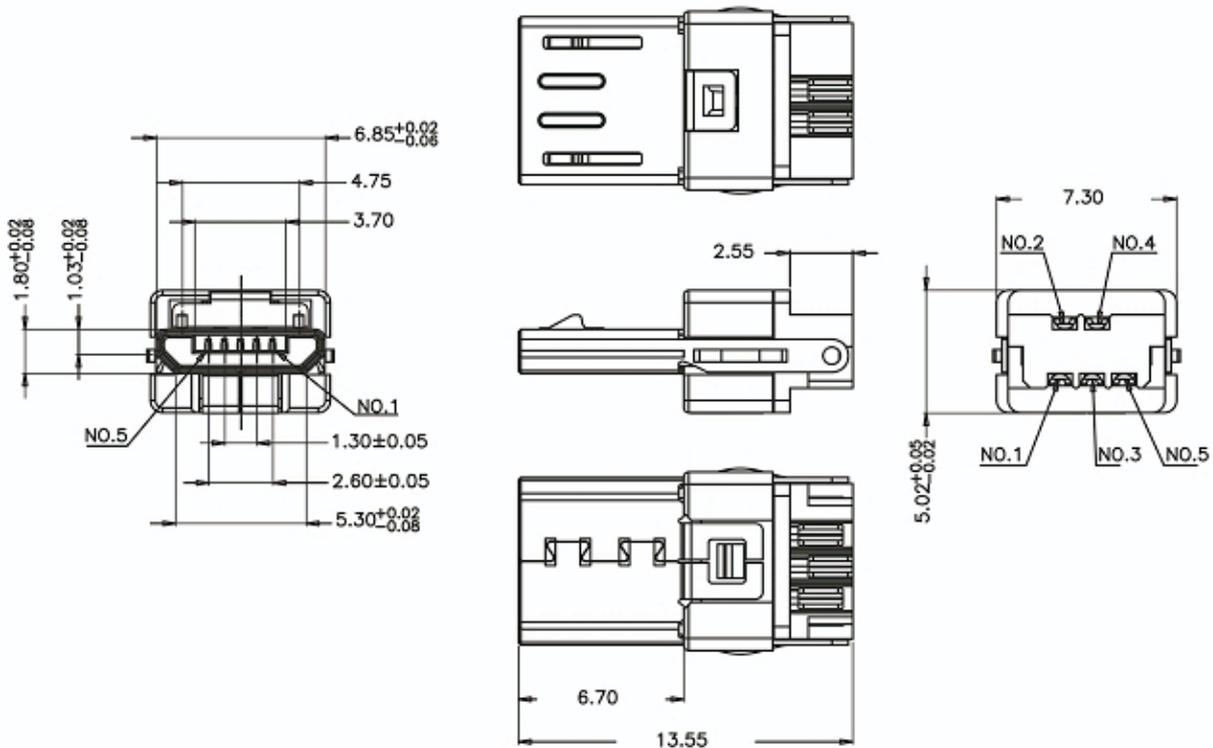

ORDER INFORMATION

KLS1-235-0

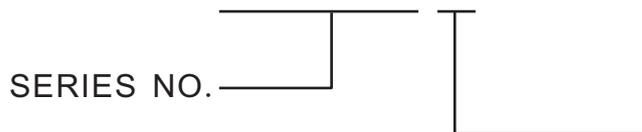

0	Gold plated
1	Matte Tin plated



USB Connector series


KLS1-234 MICRO USB 3.0 B TYPE

Electrical Characteristics

Rated Current :0.5A
 Rated Voltage: 30V AC (rms)
 Dielectric withstanding voltage: 100V DC for 1 min.
 Insulation Resistance : 100 MΩ Min.
 Contact resistance: 50 mΩ max.
 Temperature rating:-30 C ~ +80 C

Materials

Housing: LCP UL 94V-0, black color
 Contacts: Copper alloy
 Pin Plated: Gold plated or matte tin plated

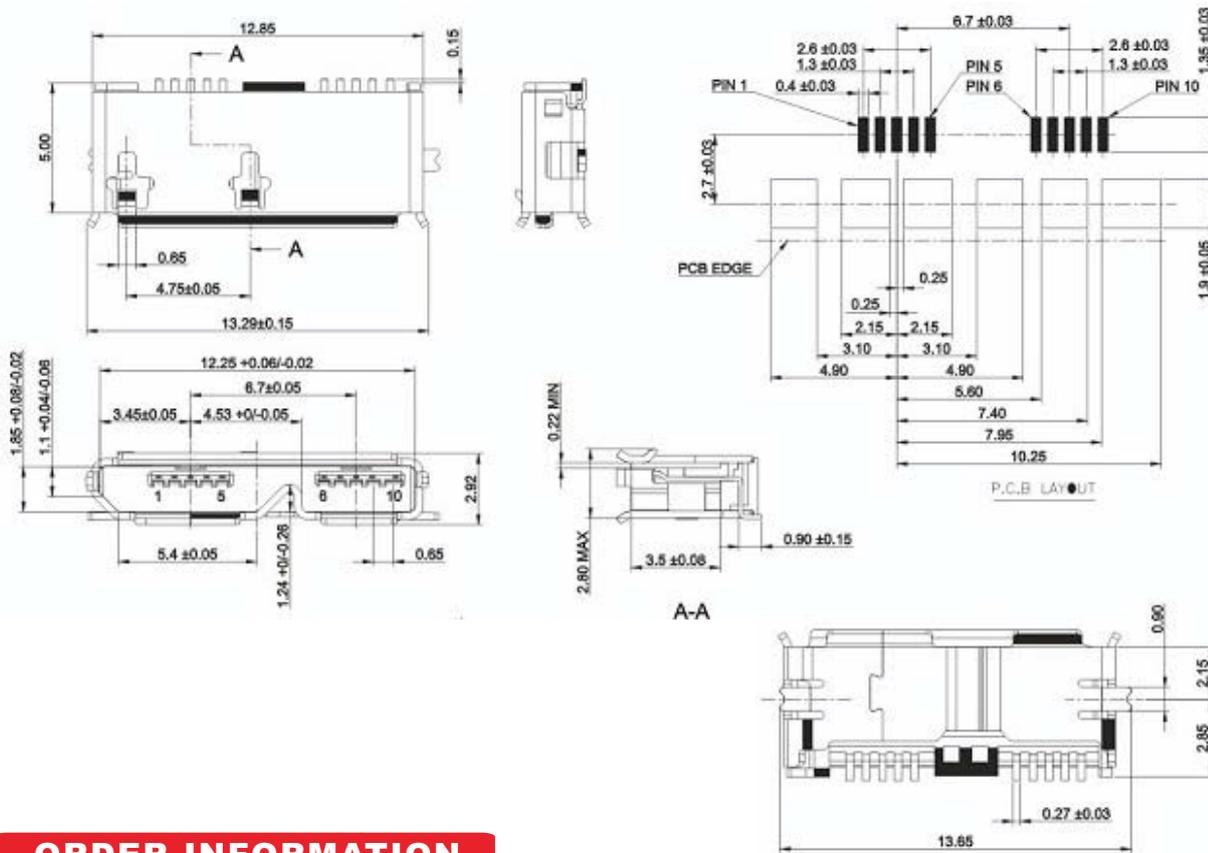

ORDER INFORMATION

KLS1-234- 0 - R

SERIES NO.

P	Blister tray packing
R	Reel packing

0	Gold plated
1	Matte Tin plated