


### Absolute maximum ratings


(Ta=25°C)

Symbol	Ratings		Unit
	N channel	P channel	
V <sub>DSS</sub>	60	-60	V
V <sub>GSS</sub>	±20	±20	V
I <sub>D</sub>	10	-10	A
I <sub>D(pulse)</sub>	15 (PW≤1ms, duty≤25%)	-15 (PW≤1ms, duty≤25%)	A
P <sub>T</sub>	4 (Ta=25°C, with all circuits operating, without heatsink) 30 (Tc=25°C, with all circuits operating, with infinite heatsink)		W
θ <sub>j-a</sub>	31.25 (Junction-Air, Ta=25°C, with all circuits operating)		°C/W
θ <sub>j-c</sub>	4.166 (Junction-Case, Tc=25°C, with all circuits operating)		°C/W
T <sub>ch</sub>	150		°C
T <sub>stg</sub>	-40 to +150		°C

### ■Equivalent circuit diagram

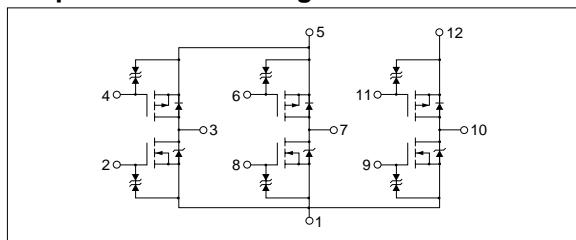

### Characteristic curves

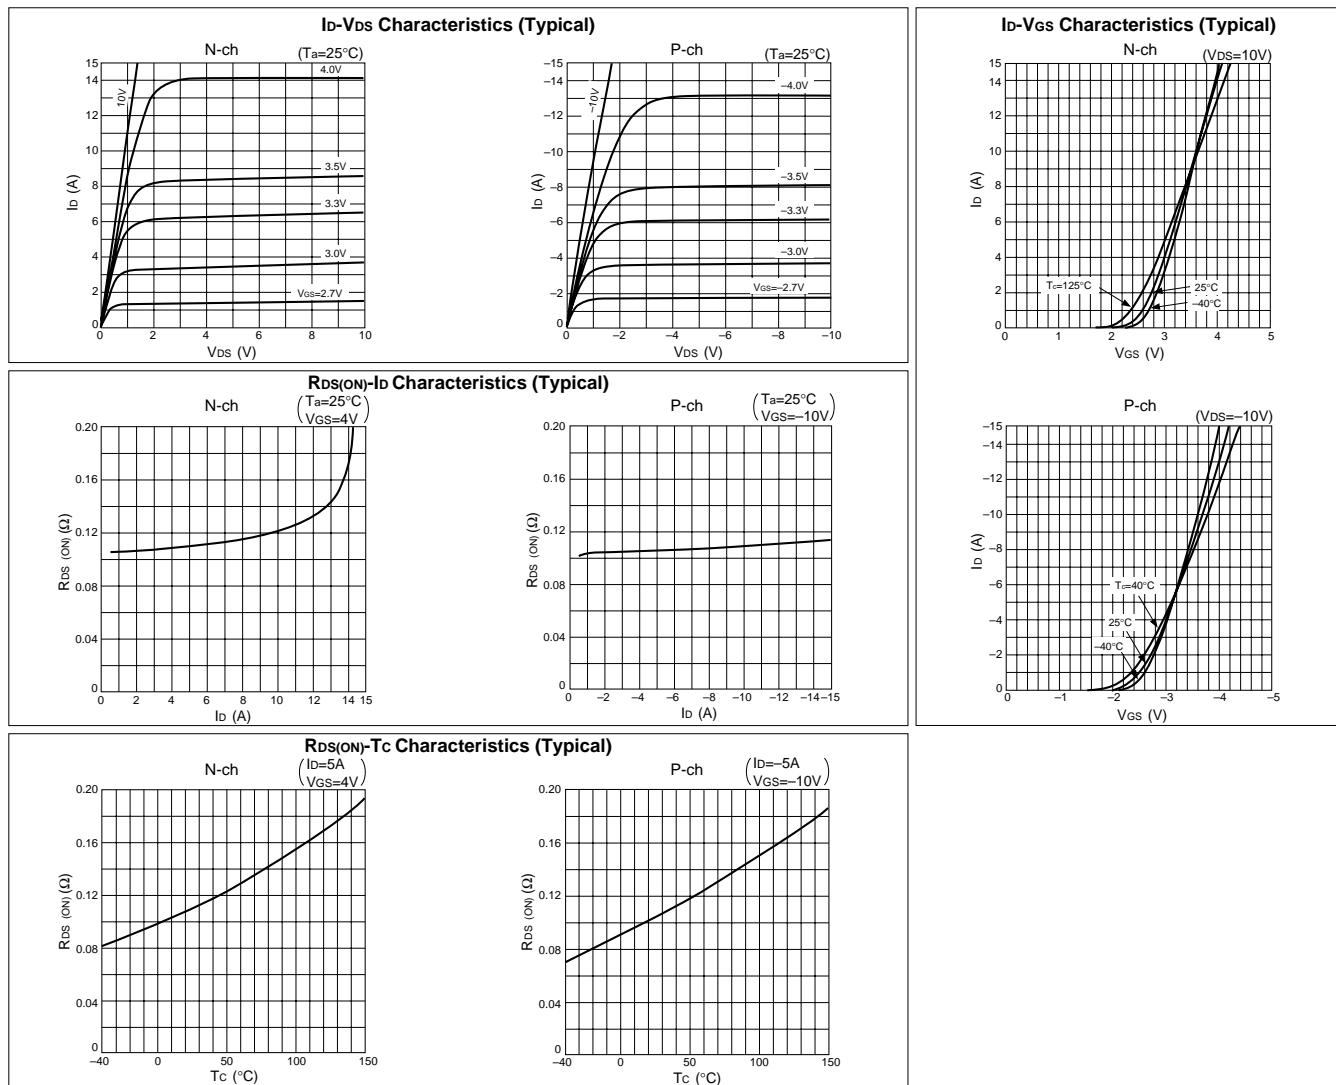

## Electrical characteristics

( $T_a=25^\circ\text{C}$ )

Symbol	N channel						P channel					
	Specification			Unit	Conditions	Specification			Unit	Conditions		
	min	typ	max			min	typ	max				
$V_{(\text{BR})\text{DSS}}$	60			V	$I_d=100\mu\text{A}, V_{GS}=0\text{V}$	-60			V	$I_d=-100\mu\text{A}, V_{GS}=0\text{V}$		
$I_{GSS}$			$\pm 10$	$\mu\text{A}$	$V_{GS}=\pm 20\text{V}$				$\mu\text{A}$	$V_{GS}=\pm 20\text{V}$		
$I_{DSS}$			100	$\mu\text{A}$	$V_{DS}=60\text{V}, V_{GS}=0\text{V}$				$\mu\text{A}$	$V_{DS}=-60\text{V}, V_{GS}=0\text{V}$		
$V_{TH}$	1.0		2.0	V	$V_{DS}=10\text{V}, I_d=250\mu\text{A}$	-1.0			-2.0	V	$V_{DS}=-10\text{V}, I_d=-250\mu\text{A}$	
$R_{e(yfs)}$		8.0		S	$V_{DS}=10\text{V}, I_d=5\text{A}$		8.7		S	$V_{DS}=-10\text{V}, I_d=-5\text{A}$		
$R_{DS(\text{ON})}$			0.14	$\Omega$	$V_{GS}=4\text{V}, I_d=5\text{A}$			0.14	$\Omega$	$V_{GS}=-10\text{V}, I_d=-5\text{A}$		
$C_{iss}$		460		pF	$V_{DS}=10\text{V}, f=1.0\text{MHz}$		1200		pF	$V_{DS}=-10\text{V}, f=1.0\text{MHz}$		
$C_{oss}$		225		pF	$V_{GS}=0\text{V}$		440		pF	$V_{GS}=0\text{V}$		
$C_{rss}$		50		pF			120		pF			
$t_d$ (on)		25		ns	$I_d=5\text{A}, V_{DD}=20\text{V}, R_L=4\Omega, V_{GS}=5\text{V}$		50		ns	$I_d=-5\text{A}, V_{DD}=-20\text{V}, R_L=4\Omega, V_{GS}=-5\text{V}$		
$t_r$		110		ns	$R_G=50\Omega$		170		ns	$R_G=50\Omega$		
$t_d$ (off)		90		ns			180		ns			
$t_f$		55		ns	see Fig.3 on page 16.		100		ns	see Fig.4 on page 16.		
$V_{SD}$		1.15		ns	$I_{SD}=10\text{A}, V_{GS}=0\text{V}$		-1.25		V	$I_{SD}=-10\text{A}, V_{GS}=0\text{V}$		
$t_{rr}$		75		V	$I_{SD}=5\text{A}, dI/dt=100\text{A}/\mu\text{s}$		100		ns	$I_{SD}=-5\text{A}, dI/dt=100\text{A}/\mu\text{s}$		

## Characteristic curves

