


Ultrafast recovery diode

Datasheet - production data

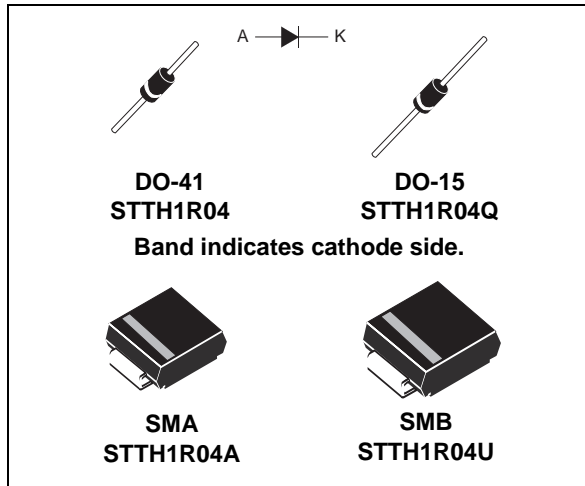

Description

The STTH1R04 series uses ST's new 400 V planar Pt doping technology. The STTH1R04 is specially suited for switching mode base drive and transistor circuits.

Packaged in axial and surface mount packages, this device is intended for use in low voltage, high frequency inverters, free wheeling and polarity protection.

Table 1. Device summary

| | |
|----------------|--------|
| $I_{F(AV)}$ | 1 A |
| V_{RRM} | 400 V |
| $T_j (max)$ | 175 °C |
| $V_F (typ)$ | 0.9 V |
| $t_{rr} (typ)$ | 14 ns |

Features

- Negligible switching losses
- Low forward and reverse recovery times
- High junction temperature

1 Characteristics

Table 2. Absolute ratings (limiting values at 25 °C, unless otherwise specified)

| Symbol | Parameter | | Value | Unit | |
|-------------|---|---------------------------------|----------------------------|------|---|
| V_{RRM} | Repetitive peak reverse voltage | | 400 | V | |
| $I_{F(AV)}$ | Average forward current, $\delta = 0.5$ | DO-41 | $T_{lead} = 100\text{ °C}$ | 1.0 | A |
| | | DO-15 | $T_{lead} = 105\text{ °C}$ | | |
| | | SMA | $T_{lead} = 125\text{ °C}$ | | |
| | | SMB | $T_{lead} = 140\text{ °C}$ | | |
| I_{FSM} | Surge non repetitive forward current | $t_p = 10\text{ ms}$ Sinusoidal | 30 | A | |
| T_{stg} | Storage temperature range | | -65 to +175 | °C | |
| T_j | Maximum operating junction temperature ⁽¹⁾ | | 175 | °C | |

1. On infinite heatsink with 10 mm lead length

Table 3. Thermal parameters

| Symbol | Parameter | | Value | Unit | |
|---------------|------------------|---|-------|------|------|
| $R_{th(j-l)}$ | Junction to lead | Lead length = 10 mm on infinite heatsink | DO-41 | 55 | °C/W |
| | | | DO-15 | 50 | |
| $R_{th(j-l)}$ | Junction to lead | | SMA | 35 | |
| | | | SMB | 25 | |

Table 4. Static electrical characteristics

| Symbol | Parameter | Test conditions | Min | Typ | Max | Unit |
|-------------|-------------------------|-----------------------|----------------------|-----|------|---------------|
| $I_R^{(1)}$ | Reverse leakage current | $T_j = 25\text{ °C}$ | $V_R = V_{RRM}$ | | 5 | μA |
| | | $T_j = 125\text{ °C}$ | | 5 | 50 | |
| $V_F^{(2)}$ | Forward voltage drop | $T_j = 25\text{ °C}$ | $I_F = 1.0\text{ A}$ | | 1.5 | V |
| | | $T_j = 100\text{ °C}$ | | 1.0 | 1.25 | |
| | | $T_j = 150\text{ °C}$ | | 0.9 | 1.15 | |

1. Pulse test: $t_p = 5\text{ ms}$, $\delta < 2\%$

2. Pulse test: $t_p = 380\text{ }\mu\text{s}$, $\delta < 2\%$

To evaluate the conduction losses use the following equation:

$$P = 0.9 \times I_{F(AV)} + 0.250 \times I_{F(RMS)}^2$$

Table 5. Dynamic characteristics ($T_j = 25\text{ }^\circ\text{C}$ unless otherwise stated)

| Symbol | Parameter | Test conditions | Min | Typ | Max | Unit |
|----------|--------------------------|--|-----|-----|-----|------|
| t_{rr} | Reverse recovery time | $I_F = 1\text{ A}$, $di_F/dt = -50\text{ A}/\mu\text{s}$, $V_R = 30\text{ V}$, $T_j = 25\text{ }^\circ\text{C}$ | | | 30 | ns |
| | | $I_F = 1\text{ A}$, $di_F/dt = -100\text{ A}/\mu\text{s}$, $V_R = 30\text{ V}$, $T_j = 25\text{ }^\circ\text{C}$ | | 14 | 20 | |
| I_{RM} | Reverse recovery current | $I_F = 1\text{ A}$, $di_F/dt = -200\text{ A}/\mu\text{s}$, $V_R = 320\text{ V}$, $T_j = 125\text{ }^\circ\text{C}$ | | 2.5 | 3.5 | A |
| t_{fr} | Forward recovery time | $I_F = 1\text{ A}$ $di_F/dt = 100\text{ A}/\mu\text{s}$ $V_{FR} = 1.1 \times V_{Fmax}$, $T_j = 25\text{ }^\circ\text{C}$ | | | 50 | ns |
| V_{FP} | Forward recovery voltage | $I_F = 1\text{ A}$ $di_F/dt = 100\text{ A}/\mu\text{s}$ | | 3.5 | | V |

Figure 1. Conduction losses versus average forward current

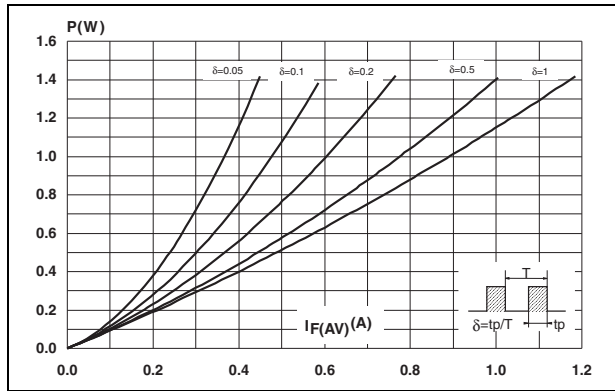


Figure 2. Forward voltage drop versus forward current

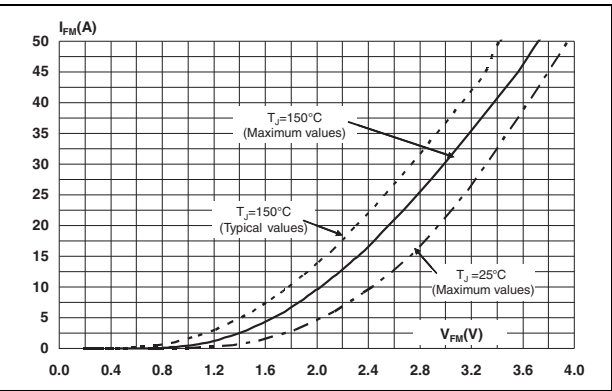


Figure 3. Relative variation of thermal impedance junction to lead versus pulse duration (DO-41)

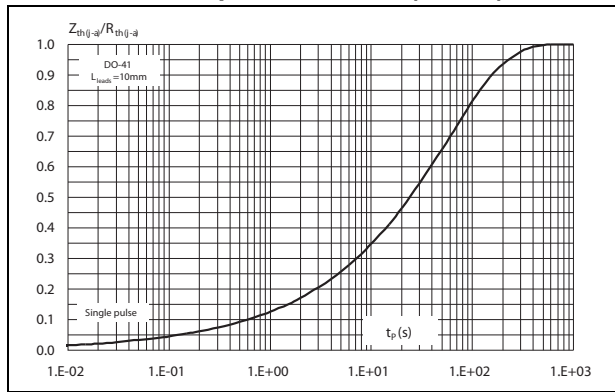


Figure 4. Relative variation of thermal impedance junction to lead versus pulse duration (DO-15)

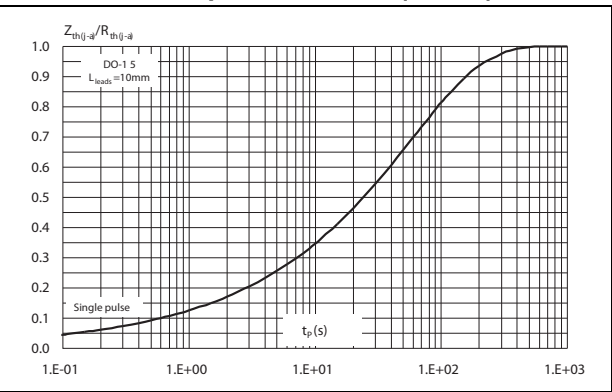


Figure 5. Relative variation of thermal impedance junction to lead versus pulse duration, SMA

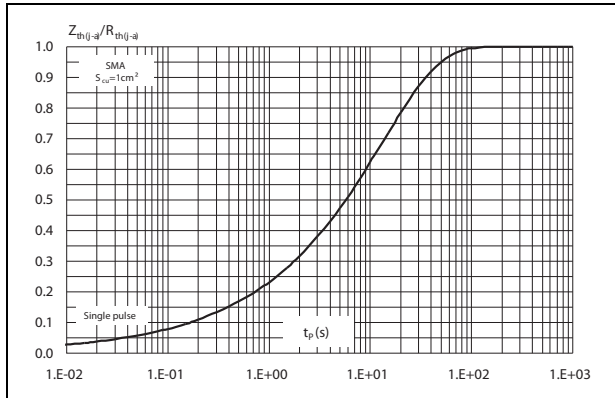


Figure 6. Relative variation of thermal impedance junction to lead versus pulse duration, SMB

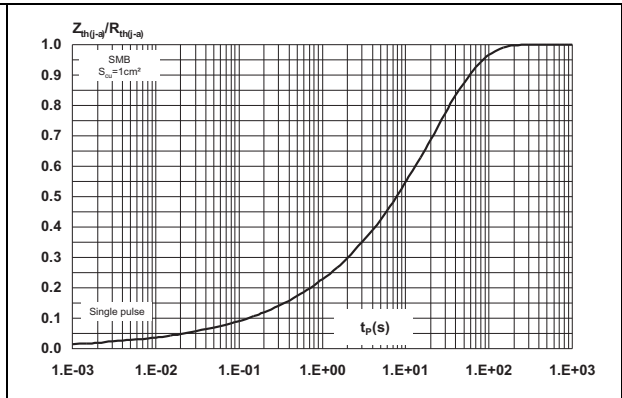


Figure 7. Junction capacitance versus reverse voltage applied (typical values)

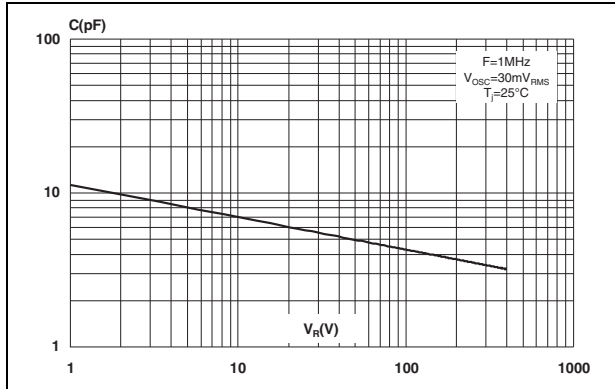


Figure 8. Reverse recovery charges versus di_F/dt (typical values)

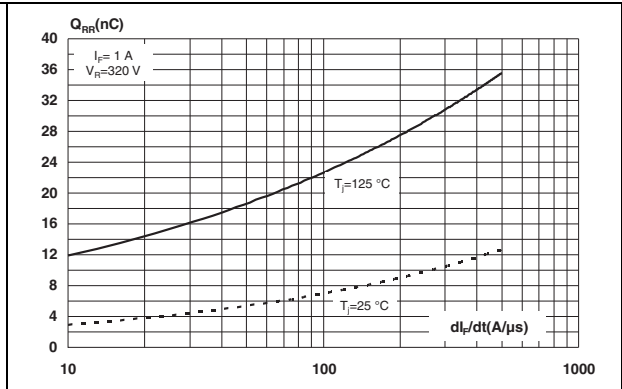


Figure 9. Reverse recovery time versus di_F/dt (typical values)

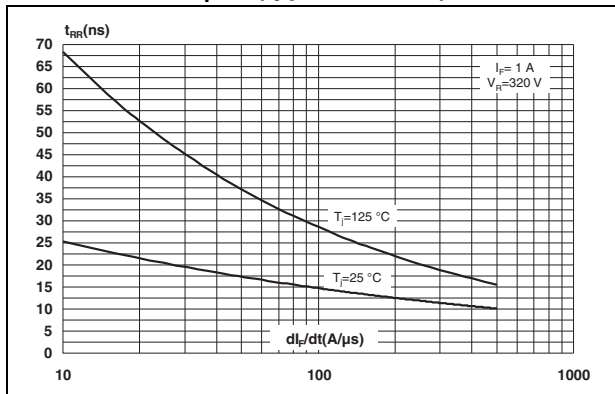


Figure 10. Peak reverse recovery current versus di_F/dt (typical values)

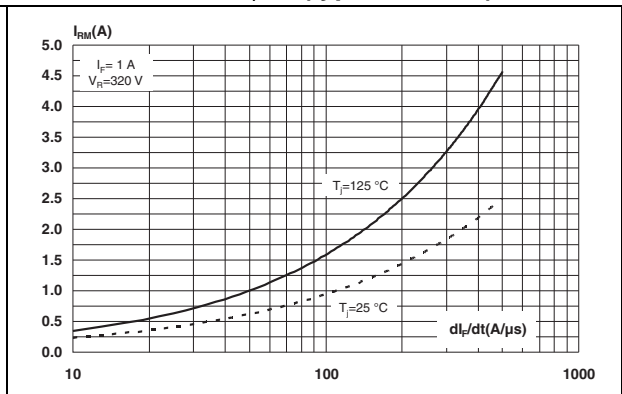


Figure 11. Relative variations of dynamic parameters versus junction temperature

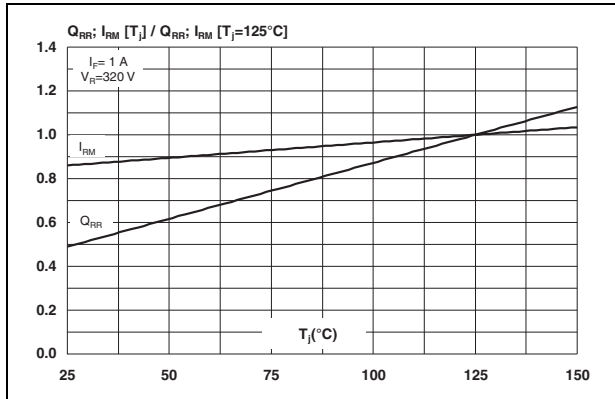


Figure 12. Transient peak forward voltage versus di_F/dt (typical values)

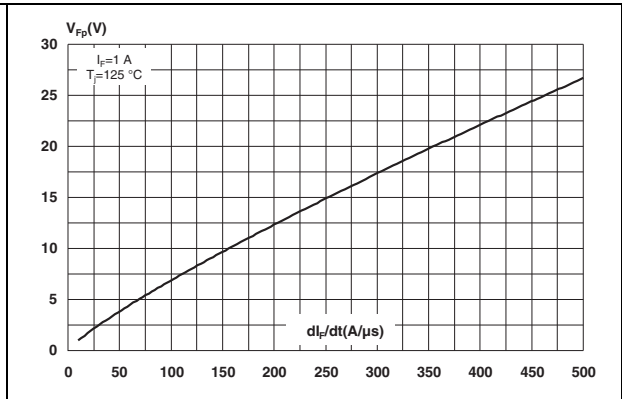


Figure 13. Forward recovery time versus di_F/dt (typical values)

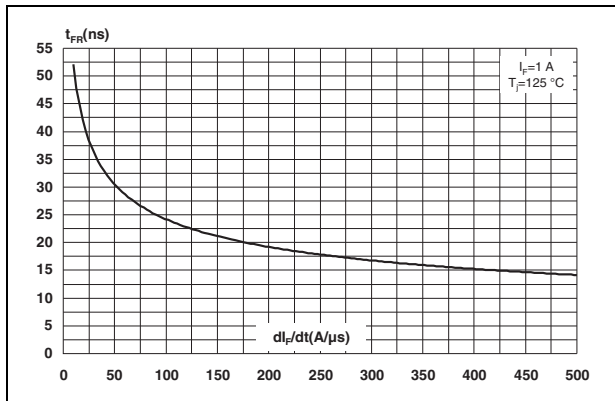


Figure 14. Thermal resistance versus lead length (DO-41)

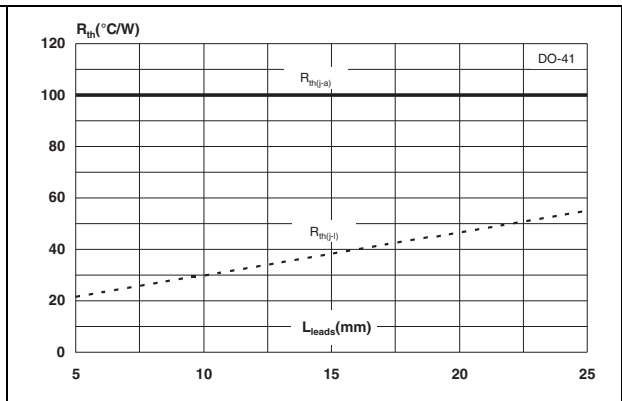


Figure 15. Thermal resistance junction to ambient versus lead length, DO-15


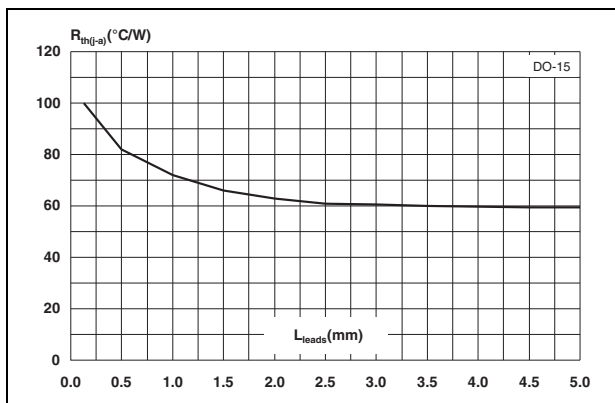


Figure 16. Thermal resistance junction to ambient versus copper surface under each lead, SMA, SMB, (epoxy FR4, copper thickness = 35 μm)

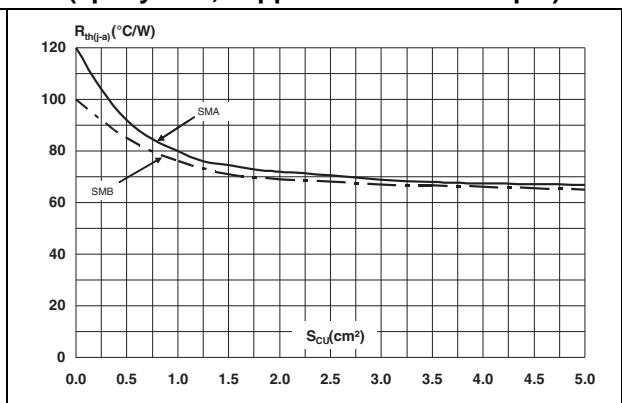

2 Package information


- Epoxy meets UL94, V0
- Cooling method: by conduction (C)

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK® is an ST trademark.

2.1 DO-14 (plastic) package information

Table 6. DO-14 (plastic) dimensions


| Ref. | Dimensions | | | |
|------|-------------|-------|--------|-------|
| | Millimeters | | Inches | |
| | Min. | Max. | Min. | Max. |
| A | 4.1 | 5.20 | 0.160 | 0.205 |
| B | 2 | 2.71 | 0.080 | 0.107 |
| C | 25.4 | | 1 | |
| D | 0.712 | 0.863 | 0.028 | 0.034 |

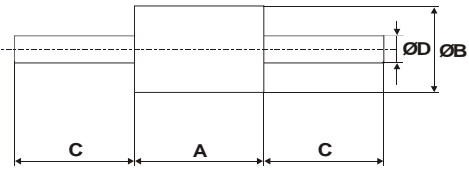

2.2 DO-15 package information

Table 7. DO-15 dimensions

| Ref. | Dimensions | | | |
|------|-------------|------|--------|-------|
| | Millimeters | | Inches | |
| | Min. | Max. | Min. | Max. |
| A | 6.05 | 6.75 | 0.238 | 0.266 |
| B | 2.95 | 3.53 | 0.116 | 0.139 |
| C | 26 | 31 | 1.024 | 1.220 |
| D | 0.71 | 0.88 | 0.028 | 0.035 |

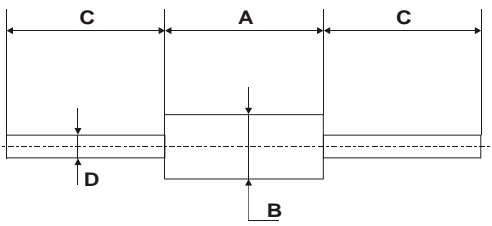


2.3 SMA package information

Table 8. SMA dimensions

| Ref. | Dimensions | | | |
|------|-------------|------|--------|-------|
| | Millimeters | | Inches | |
| | Min. | Max. | Min. | Max. |
| A1 | 1.90 | 2.45 | 0.075 | 0.094 |
| A2 | 0.05 | 0.20 | 0.002 | 0.008 |
| b | 1.25 | 1.65 | 0.049 | 0.065 |
| c | 0.15 | 0.40 | 0.006 | 0.016 |
| D | 2.25 | 2.90 | 0.089 | 0.114 |
| E | 4.80 | 5.35 | 0.189 | 0.211 |
| E1 | 3.95 | 4.60 | 0.156 | 0.181 |
| L | 0.75 | 1.50 | 0.030 | 0.059 |

Figure 17. Footprint, dimensions in mm (inches)

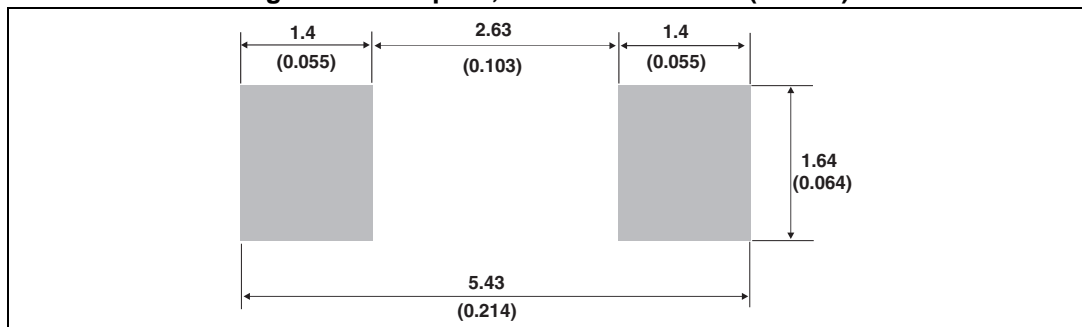


2.4 SMB package information

Table 9. SMB dimensions

| Ref. | Dimensions | | | |
|------|-------------|------|--------|-------|
| | Millimeters | | Inches | |
| | Min. | Max. | Min. | Max. |
| A1 | 1.90 | 2.45 | 0.075 | 0.096 |
| A2 | 0.05 | 0.20 | 0.002 | 0.008 |
| b | 1.95 | 2.20 | 0.077 | 0.087 |
| c | 0.15 | 0.40 | 0.006 | 0.016 |
| D | 3.30 | 3.95 | 0.130 | 0.156 |
| E | 5.10 | 5.60 | 0.201 | 0.220 |
| E1 | 4.05 | 4.60 | 0.159 | 0.181 |
| L | 0.75 | 1.50 | 0.030 | 0.059 |

Figure 18. Footprint, dimensions in mm (inches)

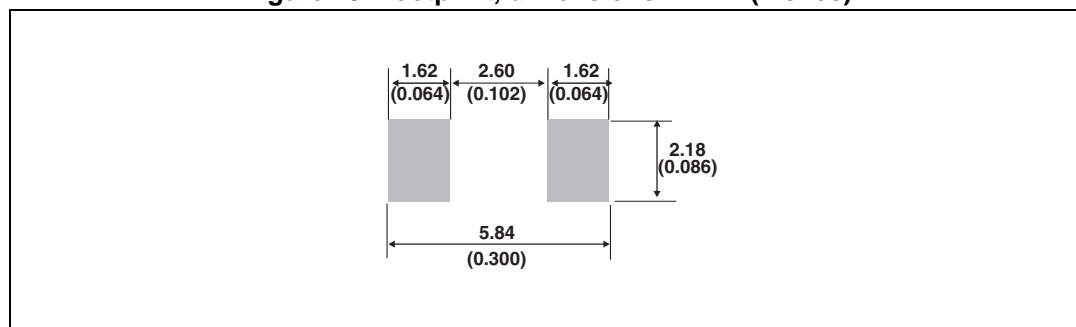

3 Ordering information

Table 10. Ordering information

| Order code | Marking | Package | Weight | Base qty | Delivery mode |
|-------------|-----------|---------|---------|----------|---------------|
| STTH1R04 | STTH1R04 | DO-41 | 0.34 g | 1000 | Ammopack |
| STTH1R04RL | STTH1R04 | DO-41 | 0.34 g | 5000 | Tape and reel |
| STTH1R04Q | STTH1R04Q | DO-15 | 0.4 g | 1000 | Ammopack |
| STTH1R04QRL | STTH1R04Q | DO-15 | 0.4 g | 6000 | Tape and reel |
| STTH1R04A | HR4 | SMA | 0.068 g | 5000 | Tape and reel |
| STTH1R04U | BR4 | SMB | 0.12 g | 2500 | Tape and reel |

4 Revision history

Table 11. Document revision history

| Date | Revision | Description of changes |
|-------------|----------|--|
| 30-May-2008 | 1 | First issue |
| 12-Nov-2015 | 2 | Updated Figure 3 , Figure 4 , Figure 5 and Figure 6 . Minor text changes. |

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2015 STMicroelectronics – All rights reserved

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STMicroelectronics:](#)

[STTH1R04A](#) [STTH1R04Q](#) [STTH1R04QRL](#) [STTH1R04RL](#) [STTH1R04U](#)