

TERMINAL BLOCK Connector



PCB Series

KLS2-332K-5.00 Series Pitch=5.00mm/10.00mm

Electrical :



- Rated voltage: 300V
- Rated current: 16A
- Contact resistance: 20mΩ
- Insulation resistance: 5000MΩ/1000V
- Withstanding Voltage: AC1500V/1Min
- Wire range: 22-14AWG 2.5mm²

Material

- Screws: M2.5 steel Zinc plated
- Wire guard: phosphor bronze Ni plated or stainless steel
- Housing: PBT,UL94V-0

Mechanical

- Temp. Range: -40°C~+105°C
- MAX Soldering: +250°C for 5 Sec.
- Torque: 0.4Nm (3.6lb.in)
- Strip length: 4.5-5mm

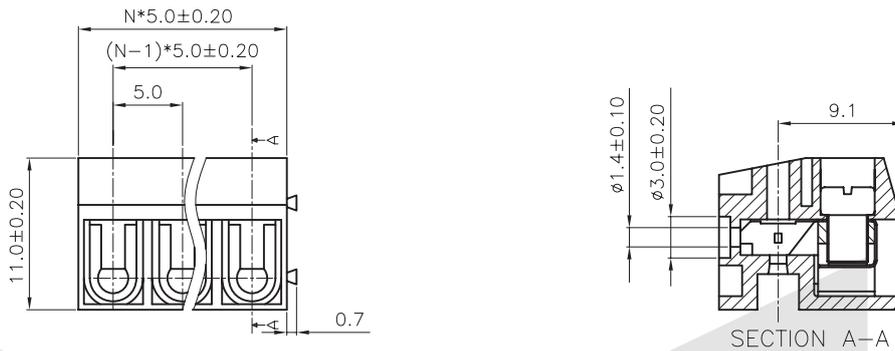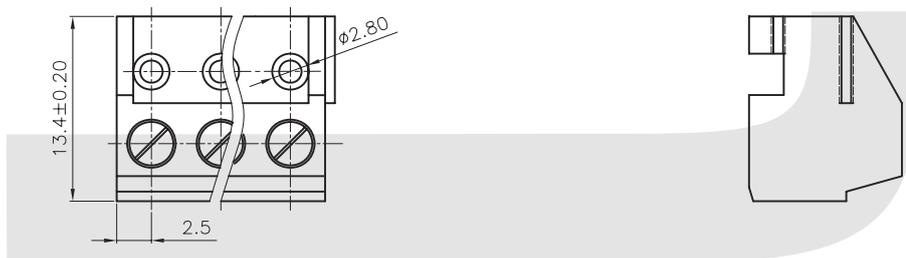

ORDER INFORMATION

Product NO.: KLS2-332K-5.00-XXP X X X

- | | | |
|-------------------------------------|-------|--|
| Pos. NO. | _____ | Customer Request |
| Series No. | _____ | Screw: C=Cross Screw
S=Slot Screw |
| Pitch: 5.00=5.00mm
10.00=10.00mm | _____ | Color: 1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transparent 8=Yellow 9=White |
| Number of Pole | _____ | |