

Connector


connectors industrial circular Series

KLS15-225-M12 Connectors Industrial Circular Series

Safety approval : UL Water proof IP \geq 55
Subminiature aviation linkers are widely used for the Hi-Tech trade. The appearances of the products has two kinds, plug-type and thread type. Used in the installation of the panel, small, exquisite and sensitive. It's nickel-plated and easy to plug-in.

Electrical Characteristics:

- Rated current: 5A
- Rated Voltage: 125V
- Operation Voltage: 200 VAC
- Withstanding Voltage :1500 VAC
- Insulation resistance :1500M Ω DC 500V
- Contact resistance: 10 m Ω DC1A
- Solder cup mouth diameter: 0.9 mm
- Solder diameter: 1.15mm

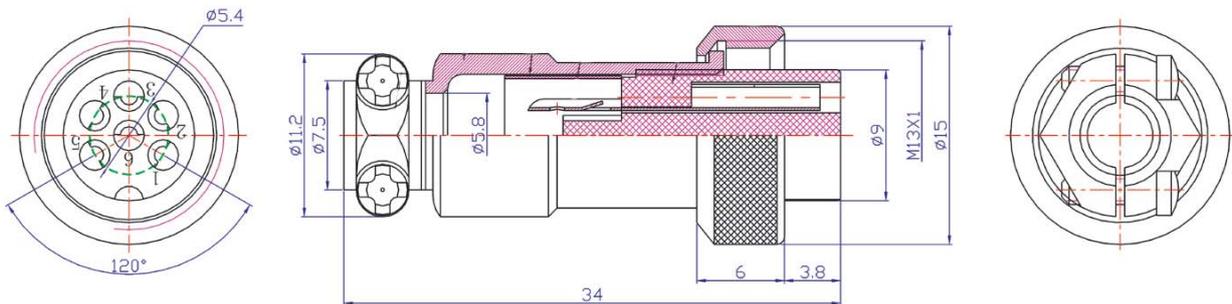


ORDER INFORMATION

Product No.: KLS15-225-M12-2 F1

Pos. No. _____
Dental regulations: M12 _____
Number of Contacts: 2, 3, 4, 5, 6P _____

TYPE Ordering



connectors industrial circular Series

KLS15-225-M12 Connectors Industrial Circular Series

Safety approval : UL Water proof IP \geq 55
Subminiature aviation linkers are widely used for the Hi-Tech trade. The appearances of the products has two kinds, plug-type and thread type. Used in the installation of the panel, small, exquisite and sensitive. It's nickel-plated and easy to plug-in.

Electrical Characteristics:


- Rated current: 5A
- Rated Voltage: 125V
- Operation Voltage: 200 VAC
- Withstanding Voltage : 1500 VAC
- Insulation resistance : 1500M Ω DC 500V
- Contact resistance: 10 m Ω DC1A
- Solder cup mouth diameter: 0.9 mm
- Solder diameter: 1.15mm



ORDER INFORMATION

Product No.: KLS15-225-M12-2 F2

Pos. No. _____
Dental regulations: M12 _____
Number of Contacts: 2, 3, 4, 5, 6P _____



TYPE Ordering




connectors industrial circular Series

KLS15-225-M12 Connectors Industrial Circular Series

Safety approval : UL Water proof IP \geq 55
Subminiature aviation linkers are widely used for the Hi-Tech trade. The appearances of the products has two kinds, plug-type and thread type. Used in the installation of the panel, small, exquisite and sensitive. It's nickel-plated and easy to plug-in.

Electrical Characteristics:

- Rated current: 5A
- Rated Voltage: 125V
- Operation Voltage: 200 VAC
- Withstanding Voltage : 1500 VAC
- Insulation resistance : 1500M Ω DC 500V
- Contact resistance: 10 m Ω DC1A
- Solder cup mouth diameter: 0.9 mm
- Solder diameter: 1.15mm

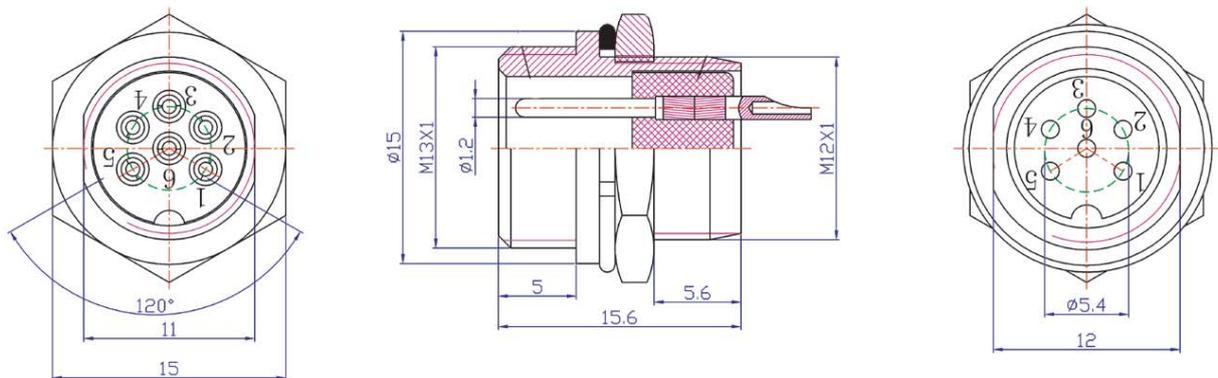


ORDER INFORMATION

Product No.: KLS15-225-M12-2 M1

Pos. No. _____
Dental regulations: M12 _____
Number of Contacts: 2, 3, 4, 5, 6P _____

TYPE Ordering






connectors industrial circular Series

KLS15-225-M12 Connectors Industrial Circular Series

Safety approval : UL Water proof IP \geq 55
Subminiature aviation linkers are widely used for the Hi-Tech trade. The appearances of the products has two kinds, plug-type and thread type. Used in the installation of the panel, small, exquisite and sensitive. It's nickel-plated and easy to plug-in.

Electrical Characteristics:

- Rated current: 5A
- Rated Voltage: 125V
- Operation Voltage: 200 VAC
- Withstanding Voltage :1500 VAC
- Insulation resistance :1500M Ω DC 500V
- Contact resistance: 10 m Ω DC1A
- Solder cup mouth diameter: 0.9 mm
- Solder diameter: 1.15mm

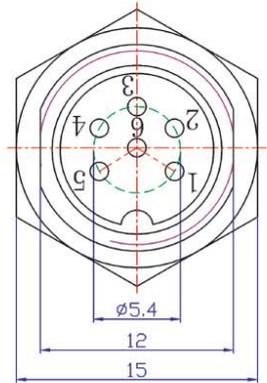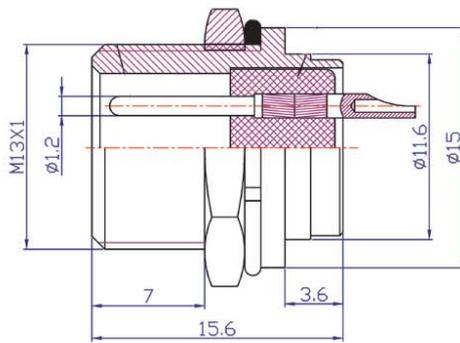

ORDER INFORMATION

Product No.: KLS15-225-M12-2 M2

Pos. No. _____
Dental regulations: M12 _____
Number of Contacts: 2, 3, 4, 5, 6P _____

TYPE Ordering

