

## SD-083 ESD Precision Screwdriver



Pro'sKit Precision ESD Safe Screwdrivers are tested in accordance with ESD Association standard; meet the requirements for tools used in static sensitive areas. Surface resistance of handles is  $10^7 \sim 10^9 \Omega$



## SD-0839 ESD Precision Screwdriver Set



Model No.	Spec	Blade length (inch)
SD-083-S3	⊖	2.0
SD-083-S4	⊖	2.4
SD-083-S5	⊖	3.0
SD-083-P2	⊕	#00
SD-083-P3	⊕	#0
SD-083-P4	⊕	#1
SD-083-T4	⊗	T4
SD-083-T5H	⊗	T5H
SD-083-T6H	⊗	T6H




Contents	
⊕	SD-083-P2 SD-083-P3 SD-083-P4
⊖	SD-083-S3 SD-083-S4 SD-083-S5
⊗	SD-083-T4
⊗	SD-083-T5H SD-083-T6H


Individual packing: Blister card

Individual packing: Pouch

## Ceramic Driver




RF coils & trimmers



Model No.	Spec.
800-114	⊖ 0.4x0.9mm (0.015"x0.035")
800-115	⊖ 0.4x1.2mm (0.015"x0.047")
800-116	⊖ 0.4x1.4mm (0.015"x0.055")
800-117	⊖ 0.4x1.8mm (0.015"x0.070")
800-118	⊖ 0.4x2.0mm (0.015"x0.078")
800-119	⊖ 0.4x2.4mm (0.015"x0.094")
800-120	⊖ 0.7x2.4mm (0.027"x0.094")
800-121	⊕ PH0
800-122	⊕ PH1.7

Individual packing: Double blister

Handle: ABS

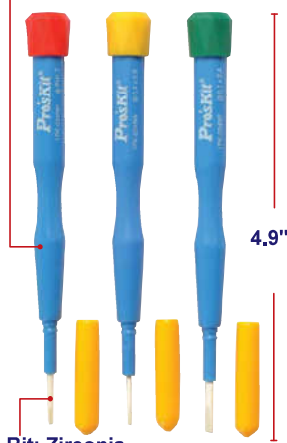


Bit: Zirconia

## 800-130 3 PC Anti-Static Alignment Tool Kit



- For protection of sensitive components
- Duplex, trimmer and square/hex tool
- Conductive nylon-avoid high voltage

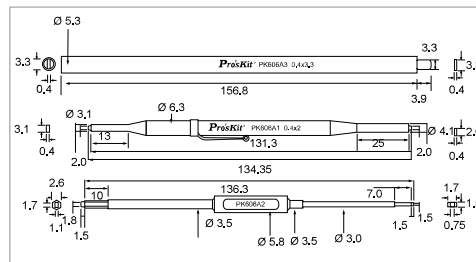

Material	Spec.
Conductive nylon	As sketch

Individual packing: Blister card



Conductive handle resistivity:  $10^6 \sim 10^{11}$