

Screwless Terminal Blocks

KLS2-3.50V-5.00

Screwless Terminal block 3.50mm pitch

Electrical:

Rated voltage: 300V

Rated current: 7A

Contact resistance: 20mΩ

Insulation resistance: 5000MΩ/1000V

Withstanding Voltage: AC2000V/1Min

Wire range: 22~18AWG 0.2~0.75MM²

Material:

Pin header: Phosphor bronze, Tin plated

Housing: PA66, UL94V-0







Wire guard: Stainless steel

Mechanical:

Temp. Range: -40°C~+105°C

MAX Soldering: +250°C for 5 Sec.

Strip length: 8.5~9.5mm

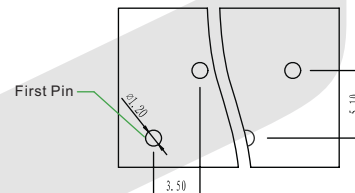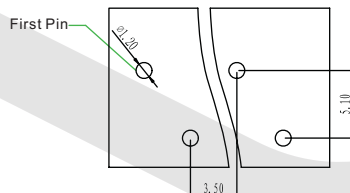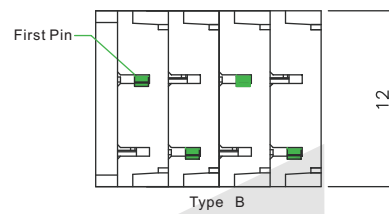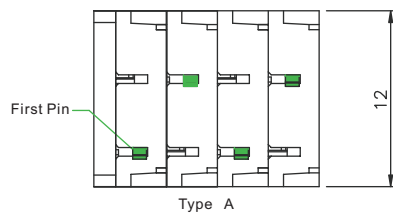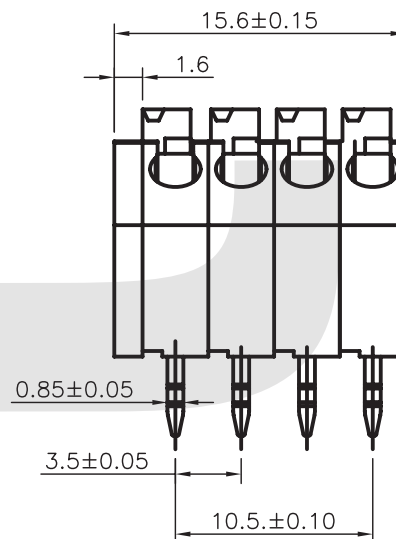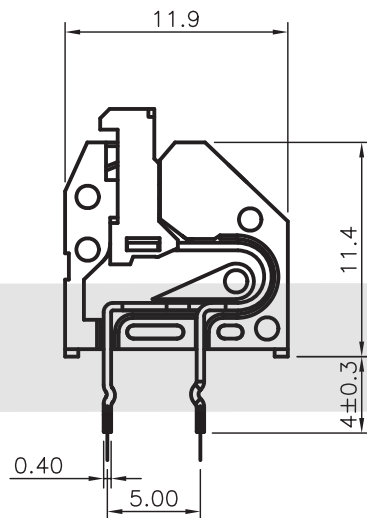

ORDER INFORMATION

Product NO.: KLS2-3.50V-5.00-XXP-1 A

Pos. NO.

Series No.

Number of Pole

Pin Type: A-Type A; B-Type B

Color: 1=Gray; 4=Green; 5=Orange