

型号说明 Ordering Information

PBS-10B-2

改进2型 Improved type 2
 电路特性 Circuitry trait
 产品序号 Product order
 按钮开关 Push-button switch

技术特性 Specification

- 1.规格 Rating:3A 125VAC;1A 250VAC
- 2.接触电阻 Contact Resistance:20mΩ max
- 3.绝缘电阻 Insulation Resistance:500VDC 100MΩ min
- 4.耐电压 Dielectric Strength:1000VAC, 1Minute
- 5.操作温度 Operating Temperature:-25°C ~ +85°C
- 6.电气寿命 Electrical Life:50,000 Cycles


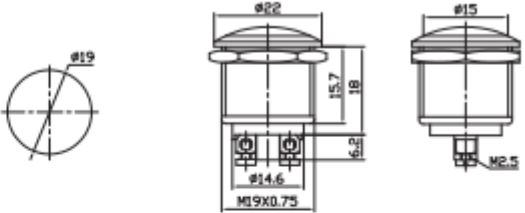

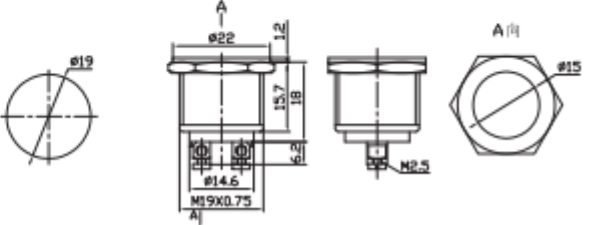

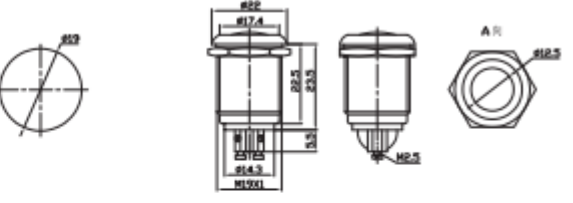

电路特性 Circuitry trait

A	ON - OFF	Push on/Push off	With lock
B	(ON) - OFF	Push on	Momentary(Open type)
C	ON - (OFF)	Push off	Momentary(Close type)

() :回弹指示 Indicates Momentary

按钮颜色 Push-button color

红 Red 白 White
 绿 Greed 黑 Black
 桔黄 Orange 黄 Yellow
 蓝 Blue

	<p>PBS-28B OFF-(ON) PBS-28C ON-(OFF) PBS-28B-W OFF-(ON) PBS-28C-W ON-(OFF) 4A 125VAC;2A 250VAC *W* Means The Switch Has Waterproof Rubber Ring(IP66)</p>	
	<p>PBS-28B-2 OFF-(ON) PBS-28C-2 ON-(OFF) PBS-28B-2-W OFF-(ON) PBS-28C-2-W ON-(OFF) 4A 125VAC;2A 250VAC *W* Means The Switch Has Waterproof Rubber Ring(IP66)</p>	
	<p>PBS-28B-3 OFF-(ON) 4A 125VAC;2A 250VAC IP66 With Waterproof Rubber Ring</p>	
	<p>PBS-29B OFF-(ON)</p>	