

CL-SM20M

High Efficiency, High Quality PV Module

Electrical Characteristics		CL-SM20M
Maximum power (Pmax)	20W	
Voltage at Pmax (Vmp)	18.6V	
Current at Pmax (Imp)	1.08A	
Open-circuit voltage (Voc)	22.9V	
Short-circuit current (Isc)	1.12A	
Temperature coefficient of Voc	$-(0.40 \pm 0.05)\% / ^\circ C$	
Temperature coefficient of Isc	$(0.065 \pm 0.01)\% / ^\circ C$	
Temperature coefficient of power	$-(0.5 \pm 0.05)\% / ^\circ C$	
NOCT (Air 20°C; Sun 0.8kW/m ² wind 1m/s)	47±2°C	
Operating temperature	-40°C to 85°C	
Maximum system voltage	600V DC	
Power tolerance	+ 3%	
Cells	monocrystalline silicon solar cell	
No. of cells and connections	36(4X9)	
Module Dimension	435mm[17.13in.]x356mm[14.02in.]x25mm[0.98in.]	
Weight	2.1kg[4.62lbs]	

* STC:Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C


* Specifications are subject to change without notice at any time.




Key Features:

- High module efficiency and stable power output
- Based on leading process technology
- Outstanding electrical performance under high temperature conditions or low irradiance conditions
- Easy of installation and all-weather applications
- 5 years product warranty(materials and workmanship)
- 20 years module power output warranty
- Peak power of single module is guaranteed in +3% power tolerance
- Strong framed module,passing loaded test of 5400 Pa (IEC61215 2nd)
- The manufacturer is certified for ISO 9001:2000


Module Diagram

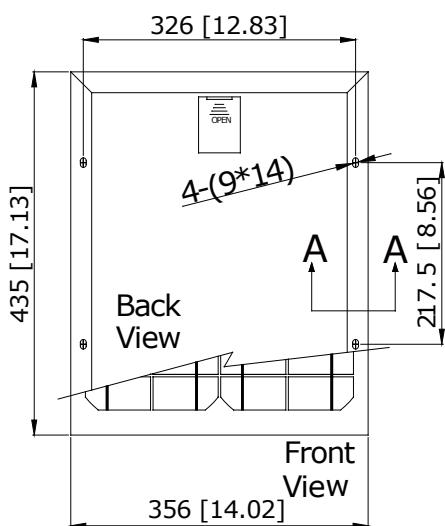

Dimensions in brackets are in inches.
Un-bracketed dimensions are in millimeters.
Unit:mm[in.]





Junction Box
Top View (Lid open)



Section A-A

I-V Curves

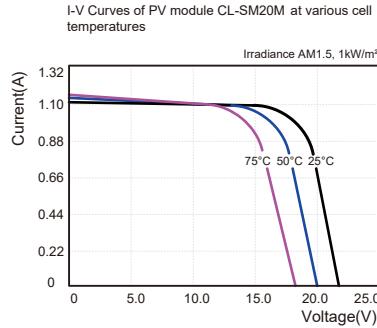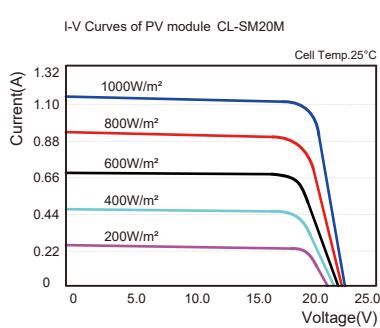

CELLEVIA POWER