


CL-SM20P

High Efficiency, High Quality PV Module

Electrical Characteristics		CL-SM20P
Maximum power (Pmax)		20W
Voltage at Pmax (Vmp)		18.2V
Current at Pmax (Imp)		1.12A
Open-circuit voltage (Voc)		22.6V
Short-circuit current (Isc)		1.18A
Temperature coefficient of Voc		$-(0.40 \pm 0.05)\% / ^\circ C$
Temperature coefficient of Isc		$(0.065 \pm 0.01)\% / ^\circ C$
Temperature coefficient of power		$-(0.5 \pm 0.05)\% / ^\circ C$
NOCT (Air 20°C; Sun 0.8kW/m ² wind 1m/s)		47±2°C
Operating temperature		-40°C to 85°C
Maximum system voltage		600V DC
Power tolerance		+ 3%
Cells		multicrystalline silicon solar cell
No. of cells and connections		36(2X18)
Module Dimension		435mm[17.13in.]x356mm[14.02in.]x25mm[0.98in.]
Weight		2.1kg[4.62lbs]

* STC:Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C


* Specifications are subject to change without notice at any time.

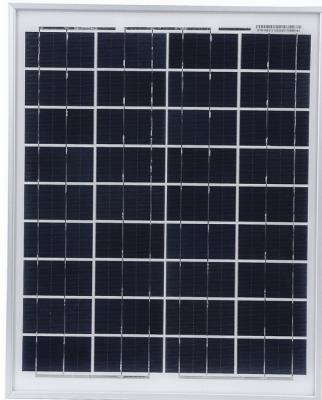

Key Features:

- High module efficiency and stable power output
- Based on leading process technology
- Outstanding electrical performance under high temperature conditions or low irradiance conditions
- Easy of installation and all-weather applications
- 5 years product warranty(materials and workmanship)
- 20 years module power output warranty
- Peak power of single module is guaranteed in +3% power tolerance
- Strong framed module,passing loaded test of 5400 Pa (IEC61215 2nd)
- The manufacturer is certified for ISO 9001:2008

Module Diagram

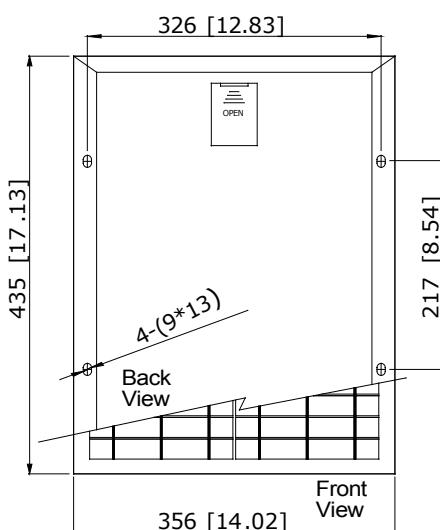

Dimensions in brackets are in inches.
Un-bracketed dimensions are in millimeters.
Unit:mm[in.]

Product's Guarantee

- 15 years module power output no less 90%
- 20 years module power output no less 80%

Applications

- Off grid residential roof-tops
- Off grid commercial/industrial roof-tops
- Rural area applications
- Solar power system
- Other off-grid applications



CELLEVIA POWER

I-V Curves

