

IT-1188 Series



FEATURES






- Side pushing SMT type
- 7.0×3.45×3.5mm
- Body boss or without boss types

APPLICATIONS

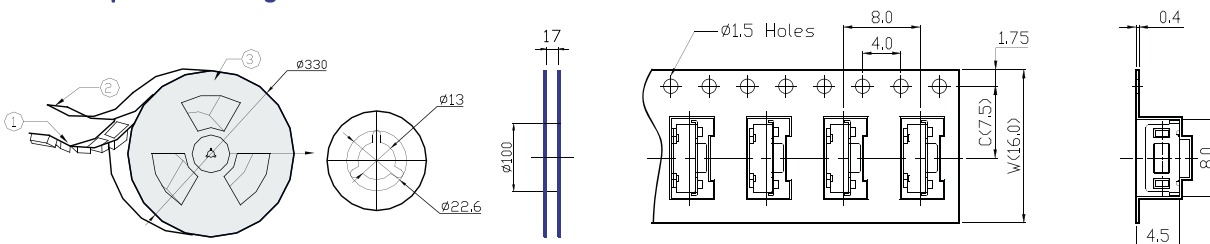
- All kinds of electronic equipments such as car audio and home appliances
- Digital Camera, Camcorders, Mobile Phones

COMMON SPECIFICATIONS

Electrical	Rating	DC 12V 50mA	
	Contact Resistance	100mΩ Max.	
	Insulation Resistance	100MΩ (DC 500V / 1 min.) Min.	
	Withstanding Voltage	250 VAC / min.	
Mechanical	Operating force	160±30gf or 250±50gf	
	Travel	0.25±0.1mm	
Endurance	Operating Life(cycles)	160gf - 50,000	250gf - 30,000

No.	Model No.	Dimension Type	PCB Land Dimension Circuit Diagram												
1	IT-1188E	    <table border="1"> <tr> <td></td><td>Emboss</td><td></td><td>L</td></tr> <tr> <td>-</td><td>Without</td><td>-</td><td>1.6</td></tr> <tr> <td>E</td><td>With</td><td>L</td><td>1.9</td></tr> </table>		Emboss		L	-	Without	-	1.6	E	With	L	1.9	 
	Emboss		L												
-	Without	-	1.6												
E	With	L	1.9												

IT-1188 Tape & Reel Package Dimensions



No.	Model No.	W	C	Pitch	Min. Package Qty / Reel	Qty / Out-carton
1	IT-1188 / IT-1188E	16	7.5	8	2,000 pcs	40,000 pcs