

# TELEPHONE PART

## Modular Plugs Series

### KLS12-RJ45-8P8C

**MATERIAL**


1. Housing :Polycarbonate(pc) UL 94V-0 or UL 94V-2
2. Contact :Phosphor Bronze,Hard Gold plated over nickel
- 3.Shieldinjc:0.25mm Thickness Copper Alloy With Tin plated
4. Gold plating:3u inch,6u inch,15u inch,30u inch,50u inch

**ELECTRICAL**



- 1.Current Rating:1.5 Amps
- 2.Voltage Rating:125 Volts AC
- 3.Insulation Resistance:100 Megohms Min.
- 4.Contact Resistance:39 Millmhos Max.
- 5.Withstanding Voltage:1000VAC RMS 50Hz or 60Hz 1 Min.

**MECHANICAL**

CABLE TO PLUG TENSILE STRENGTH:7.7Kg MINI  
DURABILITY:750MATING CYCLES MINI  
WORKING TEMPERATURE:-40°C ~60°C

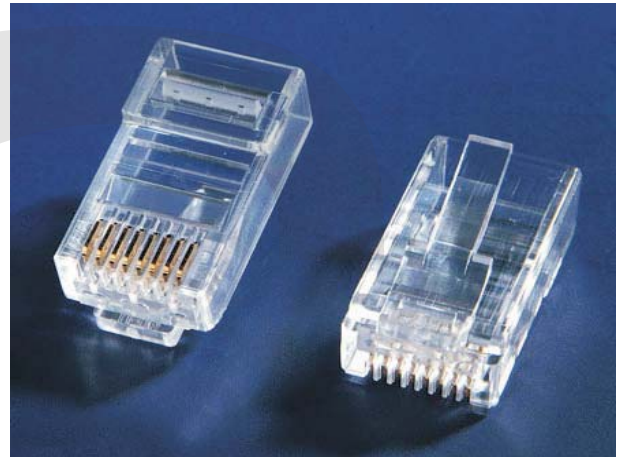

XII

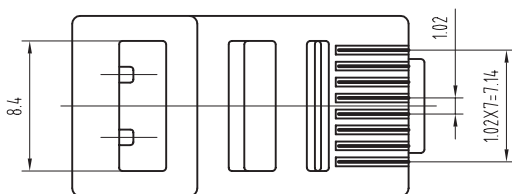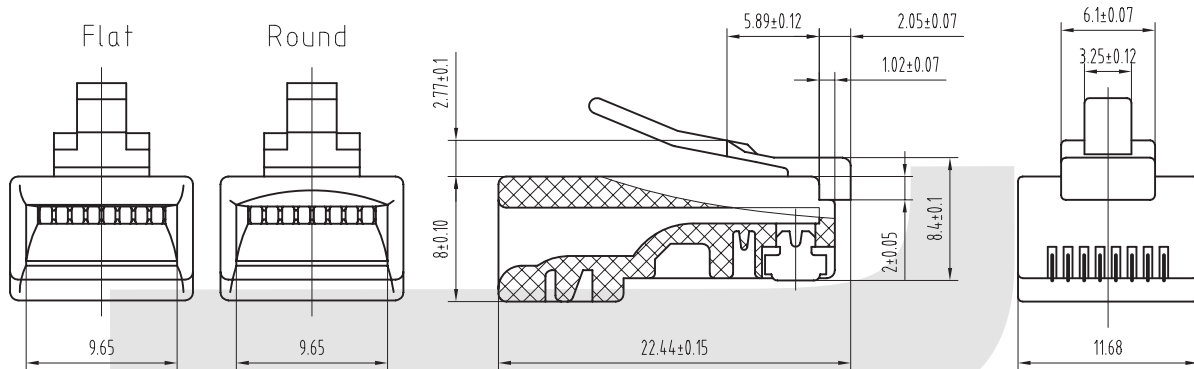

**BLADE:**

Type	A	B	C	D	E
Drawing					

## ORDER INFORMATION

**KLS12-RJ45 - 8P8C XX - X X X X**

Part Number

Point NO.	Gold Thickness	Blade style	Color	Shielded	Hatch
8P8C Point 8P6C Point 8P4C Point 8P2C Point	01-Fu" 02-3u" 03-6u" 04-15u" 05-30u" 06-50u	1=A Type 2=B Type 3=C Type 4=D Type 5=E Type	Transparent or other	0=No shielded 1=With shielded	1=Round Hatch 2=Flat Hatch