

Automotive Relay

TRV6

- 80A continuous rating 85°C
- 1A,1B&1C arrangements
- Plug-in or PC board terminals
- Optional mounting bracket



28×28×23.7

■ ORDERING CODE

TRV6 — 12VDC (D1) — 1Z — F — P1

1 2 3 4 5 6

- | | |
|--|---|
| 1. Relay Model | 4. Contact Form |
| 2. Coil Nominal Voltage
6,12,24VDC | 1Z: Form 1C
1H: Form 1A
1D: Form 1B |
| 3. None: Standard
R1: Coil parallel with 1/2W resistor 680 Ω for
Coil voltage 12VDC; 2700 Ω for coil voltage 24VDC
D1: Coil parallel with diode IN4007 the positive
pole “+”on #85 teminal
D2: Coil parallel with diode IN4007 the positive
pole “-”on #85 teminal | 5. F:WITH BRACKET
None: WITHOUT BRACKET
6. P1: PCB Type 5.3mm
P2: PCB Type 3.2mm
None: B Type |

■ COIL DATA

Nominal Voitage (VDC)	6	12	24	1.8W
Coil Resistance (Ω)	20	80	320	
Rated Current (mA)	300	150	75	
Max Operate Voltage (VDC)	3.9	7.8	15.6	
Min Release Voltage (VDC)	0.6	1.2	2.4	
Max Applicable Voltage	130% at 70℃, 170% at 23℃			



■ CONTACT DATA

Contact Form	1H/1D/1Z
Contact Material	Silver Alloy
Load	Resistive load(COS Φ 1)
Contact Ratings	NO: 50A 14VDC NC: 40A 14VDC
	NO: 80A 14VDC NC: 60A 14VDC
Minimum load	0.5A 12VDC
Max Switching Voltage	75VDC
Max Switching Current	80A
Max Switching Power	980W
Contact Resistance	100m Ω Max at 6VDC 1A
Life Expectancy	Electrical: 100, 000 Operations(at30Operations/minute)
	Mechanical: 10, 000, 000 Operations(at300Operations/minute)

■CENTACT DATA

Insulation Resistance	100MΩ Min at 500VDC
Dielectric Strength Between Open Contacts	500VAC(for one minute)
Between Contacts and coil	500VAC(for one minute)
Operate Time	7ms
Release Time	5ms
Temperature Range	-40℃to+85℃
Shock Resistance	Operating Extremes: 20G
	Damage Limits: 100G
Vibration Resistance	10-55Hz, 1.5mm
Max. switching frequency	Mechanical: 18,000 operations/hr
	Electrical: 1,800 operations/hr
Humidity	40-85%
Weight	Approx 46g
Safety Standard	

■ENGINEERING DATA

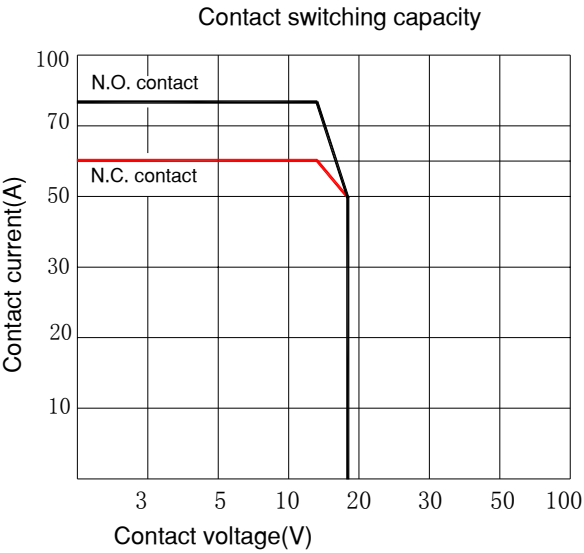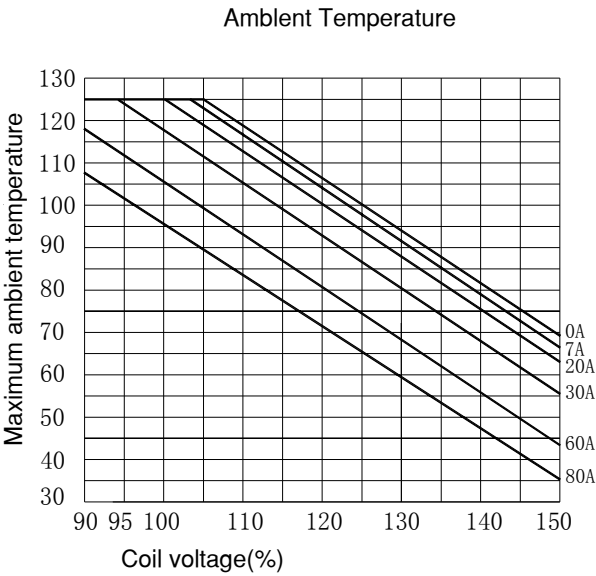

■ OVERALL AND MOUNTING DIMENSIONS

