

Разъёмы, наконечники кольцевые, латунные



Рис.	Обозначение	Сечение провода, mm ²	Размер(mm)				Толщина, мм
			D	W	L	E	
A	DJ611-2.8×0.5B	1.0-1.5	/	2.8	21.0	12.0	0.5
B	DJ611-6.3A	0.5-0.8	7.9	6.3	25.0	13.8	0.4
B	DJ611-6.3B	1.0-1.5	7.9	6.3	25.0	13.8	0.4
B	DJ612-6.3C	2.0-2.5	7.9	6.3	25.0	13.8	0.4
C	DJ617-6.3B	1.0-1.5	/	6.3	19.2	/	0.4



Рис.	Обозначение	Сечение провода, mm ²	Размер(mm)			Толщина, мм
			W	L	E	
A	DJ621-E2.8×0.5B	1.0-1.5	4.1	16.0	6.6	0.3
A	DJ621-D2.8×0.5A	0.5-0.8	3.7	15.1	6.3	0.4
A	DJ621-E4.8×0.5A	0.5-0.8	6.0	13.8		0.5
B	DJ625-4.8×0.8A	0.5-0.8	6.4	12.0	6.2	0.6
C	DJ621-5A	0.5-0.8	5.2	17	5.5	0.7
C	DJ621-5B	1.0-1.5	5.2	17	5.5	0.8
D	DJ622-A6.3B	1.0-1.5	7.7	18.5	7.5	0.9
E	DJ622-D6.3B	1.0-1.5	7.7	17.5	7.5	0.10

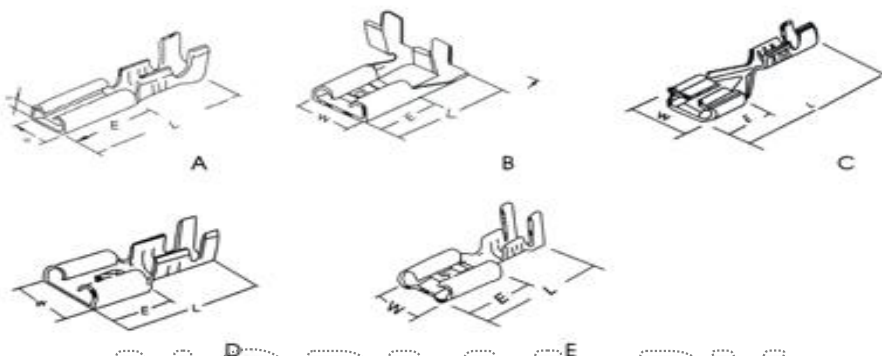


Рис.	Обозначение	Сечение провода, mm ²	Размер(mm)			Толщина, мм
			W	L	E	
A	DJ211-3.5B	1.0-1.5	3.5	15.0		0.5
A	DJ211-4B	1.0-1.5	4.0	16		0.6
B	DJ221-2.3B	1.0-1.5	3.9	19.0	7.4	0.7
B	DJ221-3.5B	1.0-1.5	3.3	17.6	6.5	0.8
B	DJ221-4B	1.0-1.5	3.8	17.6	6.5	0.9



Обозначение	Сечение провода, mm ²	Размер(mm)			Толщина, мм
		D	W	E	
Y3-2.5	0.5-2.5	3.2	9.0	17.0	0.6
DJ431-3A	0.5-0.8	3.5	10.0	17.0	0.7
DJ431-5A	0.5-0.8	5.2	12.0	17.0	0.8
DJ431-6A	0.5-0.8	6.2	15.0	17.0	0.9
DJ431-8B	1.0-1.5	8.2	19.0	19.0	0.10
DJ431-10B	1.0-1.5	10.5			0.11

