



### ■ Features

- · Constant Voltage + Constant Current mode output
- Wide input range 110-305VAC with PFC function
- · Compliance with EN61347 regulation
- Class 2/II power unit (Except for 12V)
- · Slim and Linear housing Design
- No load power consumption <0.5W</li>
- 3 years warranty


## ■ Applications

- · Panel lighting
- Strip lighting
- Decoration lighting
- · Troffer lighting
- Signage and display
- · Cove lighting

### Description

SLD-80 series is a 80W AC/DC LED driver featuring the dual modes constant voltage and constant current output. SLD-80 operates from 110  $\sim$  305VAC and offers models with different rated voltage ranging between 12V and 56V. Thanks to the high efficiency up to 92%, with the fanless design, the entire series is able to operate for -20°C  $\sim$  +90°C case temperature under free air convection. SLD-80 design with low profile and linear housing which is good for signage and linear luminaire applications.

# **■** Model Encoding

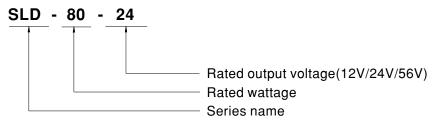



#### **SPECIFICATION**

MODEL		SLD-80-12	;	SLD-80-24			
	DC VOLTAGE	12V	:	24V			
	CONSTANT CURRENT REGION Note.2	8.4~12V		16.8 ~24V			
	RATED CURRENT	6.6A	;	3.3A			
ОИТРИТ	RATED POWER Note.5	79.2W		79.2W			
	RIPPLE & NOISE (max.) Note.3	150mVp-p	240mVp-p				
	VOLTAGE TOLERANCE Note.4						
	LINE REGULATION	±0.5% ±0.5%					
	LOAD REGULATION	±1.5% ±0.5%					
	SETUP, RISE TIME Note.6	500ms, 80ms 115VAC / 230VAC					
	,	10ms/230VAC 10ms/115VAC					
	HOLD UP TIME (Typ.)	110~ 305VAC 155~ 431VDC					
	VOLTAGE RANGE Note.5	(Please refer to "STATIC CHARACTERISTIC" section)					
	FREQUENCY RANGE	47 ~ 63Hz					
	TREQUERCTRANGE						
	POWER FACTOR	PF≥0.97/115VAC, PF≥0.95/230VAC, PF≥0.92/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)					
NPUT	TOTAL HARMONIC DISTORTION	THD<10%(@load≧60%/115VC,230VAC; @load≧75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)					
	EFFICIENCY (Typ.)	90.5%		91.5%			
	AC CURRENT	0.9A / 115VAC	0.38A/277VAC				
	INRUSH CURRENT(Typ.)	COLD START 50A(twidth=270µs me	asured at 50% Ipeak) at 2	30VAC; Per NEMA 410			
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	8 units (circuit breaker of type B) / 16 units (circuit breaker of type C) at 230VAC					
	LEAKAGE CURRENT	<0.25mA/277VAC					
	NO LOAD POWER CONSUMPTION	<0.5W					
		95 ~ 108%					
	OVER CURRENT	Constant current limiting or Hiccup mode, recovers automatically after fault condition is removed					
DOTECTION	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed					
ROTECTION	OHORY OHOOTI	14 ~ 17V 28 ~ 34V					
	OVER VOLTAGE	Shut down and latch off o/p voltage, re-power on to recover					
	OVER TEMPERATURE	Hiccup mode, recovers automatically after fault condition is removed					
	WORKING TEMP.	Trace=-20 ~ +90°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)					
	MAX. CASE TEMP.	Tcase=+90°C					
ENVIRONMENT		20 ~ 95% RH non-condensing					
	WORKING HUMIDITY	-40 ~ +80°C					
	STORAGE TEMP. TEMP. COEFFICIENT						
		±0.03%/°C (0~50°C)					
	VIBRATION	10 ~ 500Hz, 2G 12min./1cycle, period					
SAFETY & EMC	SAFETY STANDARDS Note.8	UL8750(type"HL"),CSA C22.2 No. 250.13-12, ENEC EN61347-1, EN61347-2-13 independent, EN62384, EAC TP TC 004, GB19510.1,GB19510.14					
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC					
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH					
	EMC EMISSION Note.8	Parameter	Standard	00/7/7	Test Level/Note		
		Conducted	EN55015(CISPR15)				
		Radiated	EN55015(CISPR15)	, ,			
		Harmonic Current	EN61000-3-2 ,GB/T	1/625.1	Class C @load≥60%		
		Voltage Flicker	EN61000-3-3				
	EMC IMMUNITY	Parameter	Standard		Test Level/Note		
		ESD	EN61000-4-2		Level 3, 8KV air ; Level 2, 4KV contact		
		Radiated	EN61000-4-3		Level 2		
		EFT/Burst	EN61000-4-4		Level 2		
		Surge	EN61000-4-5		1KV/Line-Line		
		Conducted	EN61000-4-6		Level 2		
		Magnetic Field	EN61000-4-8		Level 2		
		Voltage Dips and Interruptions	EN61000-4-11		>95% dip 0.5 periods, 30% dip 25 periods >95% interruptions 250 periods		
	MTBF	867.33K hrs min. Telcordia SR-332 (Bellcore); 260.96K hrs min. MIL-HDBK-217F (25°C)					
OTHERS	DIMENSION	320*30*16.8mm (L*W*H)					
	PACKING	0.206 Kg; 64pcs / 14.184Kg / 0.75CUFT					
NOTE	All parameters NOT specially     Please refer to "DRIVING M     Ripple & noise are measured	y mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature.					



#### **SPECIFICATION**

MODEL		SLD-80-56					
	RATED CURRENT	1400mA					
ОИТРИТ	RATED POWER Note.2	78.4W					
	CONSTANT CURRENT REGION Note.3	30 ~56V					
	FULL POWER CURRENT RANGE						
	OPEN CIRCUIT VOLTAGE (max.)						
	CURRENT ADJ. RANGE	700~2100mA					
	CURRENT RIPPLE	5.0%(@rated current)					
	CURRENT TOLERANCE	±5%					
	SET UP TIME Note.5	500ms/230VAC, 1200ms/115VAC					
	OLI OI TIME NOTE.	110 ~ 305VAC					
	VOLTAGE RANGE Note.2	(Please refer to "STATIC CHARACTERISTIC" and " DRIVING METHODS OF LED MODULE"section)					
	EDECHENCY DANCE	47 ~ 63Hz					
	FREQUENCY RANGE						
	POWER FACTOR (Typ.)	$PF \ge 0.97 / 115VAC$ , $PF \ge 0.95 / 230VAC$ , $PF \ge 0.92 / 277VAC$ at full load					
		(Please refer to "Power Factor Characteristic" section)					
	TOTAL HARMONIC DISTORTION	THD<10% (@ load≥60% at 115VAC/230VAC,@load≥75% at 277VAC)					
INPUT		Please refer to "TOTAL HARMONIC DISTORTION (THD)" section					
	EFFICIENCY (Typ.)	92.0%					
	AC CURRENT (Typ.)	0.9A / 115VAC	0.38A / 277VAC				
	INRUSH CURRENT(Typ.)	COLD START 50A(twidth=270µs measured at 50% lpeak) at 230VAC; Per NEMA 410					
	MAX. NO. of PSUs on 16A	8 unit(circuit breaker of type B) / 16 units(circuit breaker of type C) at 230VAC					
	CIRCUIT BREAKER	o aniit(oiiouit bieakei oi type b) / 10 u	into contain breaker or type of at 250 VAC				
	LEAKAGE CURRENT	<0.25mA / 277VAC					
	NO LOAD POWER CONSUMPTION	<0.5W					
	OVED DOWED	110 ~ 150%					
	OVER POWER	Hiccup mode, recovers automatically after fault condition is removed					
PROTECTION	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed					
KUIECIION	CHOIL CHICOH	60 ~ 70V					
	OVER VOLTAGE	Shut down output voltage, re-power on to recovery					
	OVER TEMPERATURE	Hiccup mode, recovers automatically after fault condition is removed					
ENVIRONMENT	WORKING TEMP.	Tcase=-20 ~ +90°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)					
	MAX. CASE TEMP.	·					
	1 1	Tcase=+90°C					
	WORKING HUMIDITY	20 ~ 95% RH non-condensing					
	STORAGE TEMP.	-40 ~ +80°C					
	TEMP. COEFFICIENT	±0.03%/°C (0~60°C)					
	VIBRATION	10 ~ 500Hz, 2G 12min./1cycle, period	d for 72min. each along X, Y, Z axes				
SAFETY & EMC	SAFETY STANDARDS Note.4	UL8750(type"HL"), CSA C22.2 No. 250.13-12, ENEC EN61347-1, EN61347-2-13 independent, EN62384, EAC TP TC 004, GB19510.1, GB19510.14					
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC					
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°	C/70% RH				
	EMC EMISSION Note.4	Parameter	Standard	Test Level/Note			
		Conducted	EN55015(CISPR15) ,GB/T17743				
		Radiated	EN55015(CISPR15) ,GB/T17743				
		Harmonic Current	EN61000-3-2 ,GB/T17625.1	Class C @load≥60%			
		Voltage Flicker	EN61000-3-3				
	EMC IMMUNITY	EN61547					
		Parameter	Standard	Test Level/Note			
		ESD	EN61000-4-2	Level 3, 8KV air : Level 2, 4KV contact			
		Radiated	EN61000-4-3	Level 2			
		EFT/Burst	EN61000-4-4	Level 2			
		Surge	EN61000-4-5	1KV/Line-Line			
			EN61000-4-6	Level 2			
		Conducted					
		Magnetic Field	EN61000-4-8	Level 2			
		Magnetic Field		>95% dip 0.5 periods, 30% dip 25 periods			
			EN61000-4-8 EN61000-4-11	>95% dip 0.5 periods, 30% dip 25 periods >95% interruptions 250 periods			
	мтвғ	Magnetic Field	EN61000-4-11	>95% dip 0.5 periods, 30% dip 25 periods			
OTHERS	MTBF DIMENSION	Magnetic Field  Voltage Dips and Interruptions	EN61000-4-11	>95% dip 0.5 periods, 30% dip 25 periods >95% interruptions 250 periods			

- 3. Please refer to "DRIVING METHODS OF LED MODULE".
- 4. This series meets the typical life expectancy of 30000 hours of operation when Tcase, particularly (c) point (or TMP, per DLC), is about 75°C or less.
- 5. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.
- 6. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.


  7. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.

  8. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com

  9. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).

### ■ BLOCK DIAGRAM


PFC fosc: 50~120KHz PWM fosc: 60~130KHz

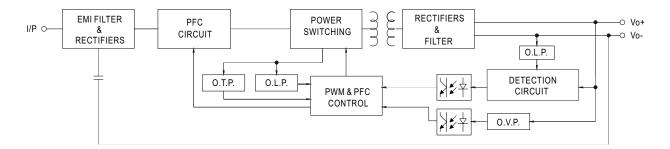

### **■** DRIVING METHODS OF LED MODULE


#### SLD-80-12,24

\* This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

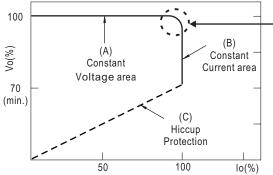

Typical output current normalized by rated current (%)


#### **SLD-80-56**

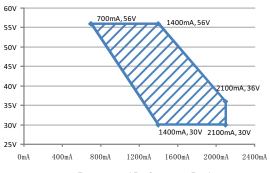

Recommend Performance Region

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.

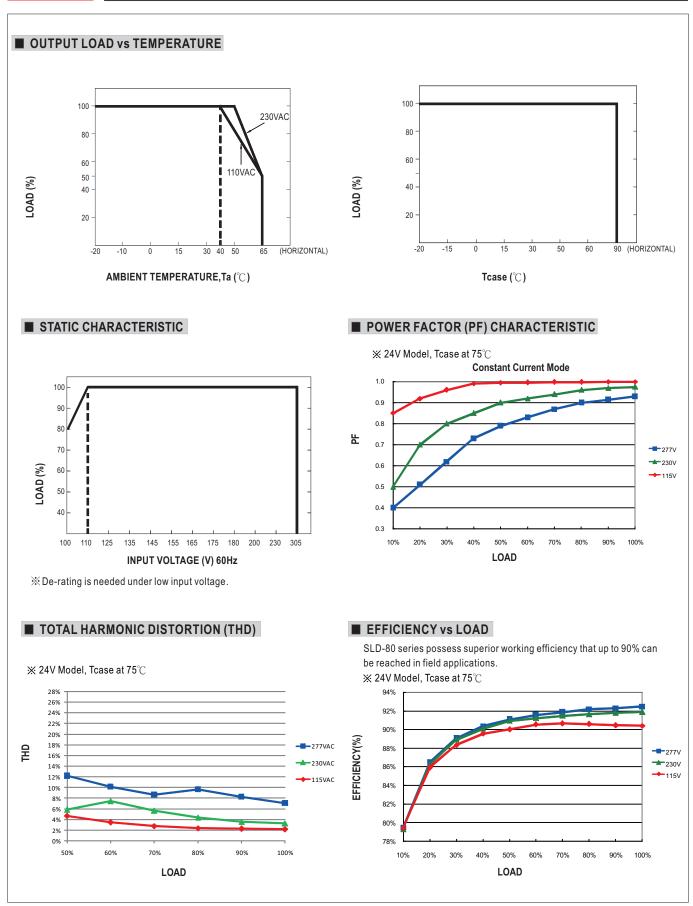

## ■ LIFE TIME 120 100 80 LIFETIME(Kh) 60 40 20 0 25 30 35 40 45 50 55 60 65 70 75 80 85 Tcase (°C) ■ Mechanical Specification Unit:mm 56V with Io adjustable 320 TB1 TB2 312 Tcase 124 ※ T case: Max. Case Temperature. TB1 wiring: TB2 wiring: 9-10mm 9-10mm ☐ 0.75-1.50mm<sup>2</sup> ☐ 0.75-1.50mm<sup>2</sup> Terminal Pin No. Assignment (TB1): Terminal Pin No. Assignment (TB2): DEGSON DG219-3.5(GRAY) DEGSON DG219-3.5(RED/BLACK) Pin No. Assignment Pin No. Assignment AC/L +V AC/N -V 2 2 **■ INSTALLATION MANUAL** Please refer to: http://www.meanwell.com/manual.html